

# System Radiologiczny PLX 160A

X-RAY SERIES


## PLX160

High Frequency X-ray Radiograph System (200mA)

### Specifications

- ◇ Power Output: 15kW/25kW
- ◇ Inverter Frequency: 40kHz
- ◇ X-ray tube: XD56-5 17/130
  - Focus: Small focus: 0.3 Large focus: 0.6
  - Thermal capacity: 212kJ(300kHU)
- ◇ The speed of the rotary anode: 3000rpm
- ◇ Tube current: 200mA
- ◇ Tube voltage: 40~125kV
- ◇ mAs: 0.4~360mAs
- ◇ Bucky grid: Grid density 103L/INCH, Grid ratio:10:1
  - Focus distance:150cm Stationary 18" x 18"(import)
- ◇ Power supply: 220V 50Hz, Capacity: ≥16kW
- ◇ Operation method: graphic remote-control LCD touch screen and wireless remote-control exposure (Optional: console of graphic remote-control LCD touch screen)

[ Optional ]  
Console of PLX160  
High Frequency X-ray Camera

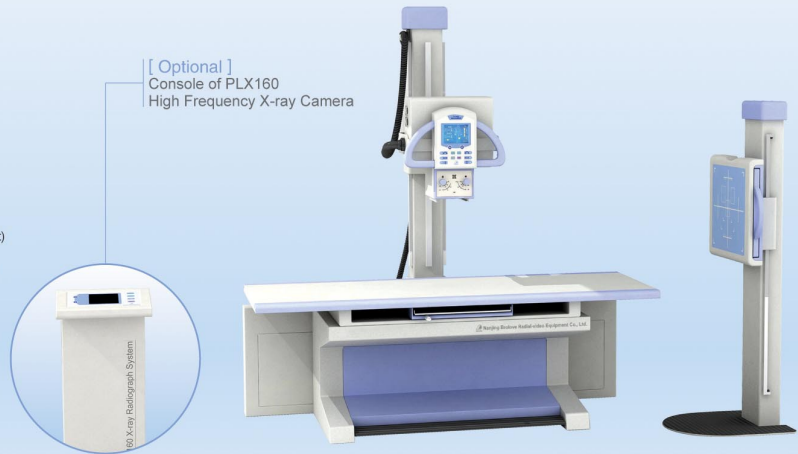

**PERLONG**  
MEDICAL

**For Overseas Market:**  
Perlove Radial-video Equipment Co. Ltd.

Add: No. 168 Kaiyuan Road Jiangning District Science Park, Nanjing 211112, China  
Tel: +86-025-87187780 68571866-9350 9353 Fax: +86-025-87187780  
http:// www.perlong.com E-mail: overseas@perlong.com.cn

*We are manufacturer, so we can give you more!*

